

# Gear Keeper<sup>®</sup>

## Pepper Spray Keeper<sup>™</sup> Holder & Tether

### **Gear Keeper's Guarantee of Quality and Support... Our Unbreakable Promise:**

Manufacturer defects covered for as long as you own it, plus fair wear-and-tear repair. See website for complete details and service assistance.



### **WARNING**

Do NOT release Retractor end when fully extended if no device is attached  
Retraction may be rapid and forceful, resulting in injury and/or damage to the product.

### **INSPECTION PRIOR TO USE**


Inspect line and connections for wear and integrity.  
Repair or Replace as necessary to avoid loss and damage of gear/devices.



- ▶ **2 Mounting Options**
  - MOLLE System/Belt or Pack Strap
- ▶ **Fast Action Accessible Holder**
- ▶ **Retracts Pepper Spray Back to Holder - avoids loss**



## ▶ Adjustable Loop




### Adjusting Loop

- A. Loosen set screw so elastic can slide
- B. Set position of elastic loop to be slightly smaller than tube/gear being held.
- C. Tighten set screw
- D. Excess tail can be cut and burned as desired

## ▶ 2 Mounting Options

### Belt Mount Securely Attaches to any Thickness Belt

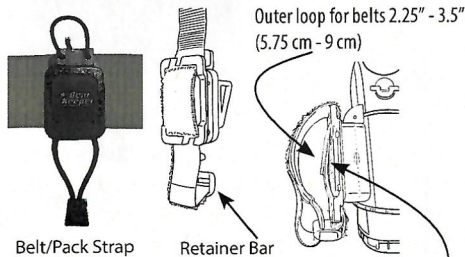


A. MOLLE Clip to be in vertical position. If not, remove screws and reposition

B. Install Velcro strap onto MOLLE Clip with retainer bar in bottom position (as shown)

C. Wrap Velcro strap around belt, feed Loop through retainer bar and cinch tight

### MOLLE Mount

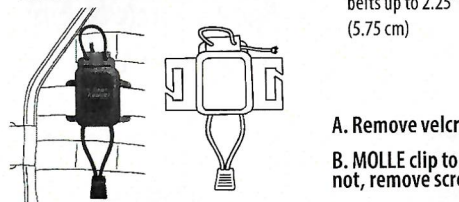

A. Remove velcro strap (if installed)

B. MOLLE clip to be in horizontal position. If not, remove screws and reposition

C. Weave MOLLE clip onto MOLLE strap

## ▶ Specifications

- Spectra/Nylon Line
- Stainless Steel Spring & Hardware
- 32" (81 cm) Extension
- 9 oz. (255 g) Retraction Force
- 60 lbs. (27 kg) Breaking Strength



Patent # 5,697,572  
 Patent # 6,591,461  
 Patent # 6,966,519  
 Patents Pending

5720 Nicolle Street  
 Ventura, CA 93003  
 (888) 588-9981 / (805) 658-9922

www.gearkeeper.com  
 info@gearkeeper.com

RT4-5701 Pepper Spray  
 Keeper



6-0036-36