





Installation Instructions

Step 1: Begin by placing lower corner of **GlassKeeper** (A) onto the lower corner of the B-post (B) and the door frame. **GlassKeeper** should extend past top of window.

While maintaining **GlassKeeper** position, peel yellow backing off bottom corner about 6-8" and adhere **GlassKeeper** to the window in the B-post column corner.


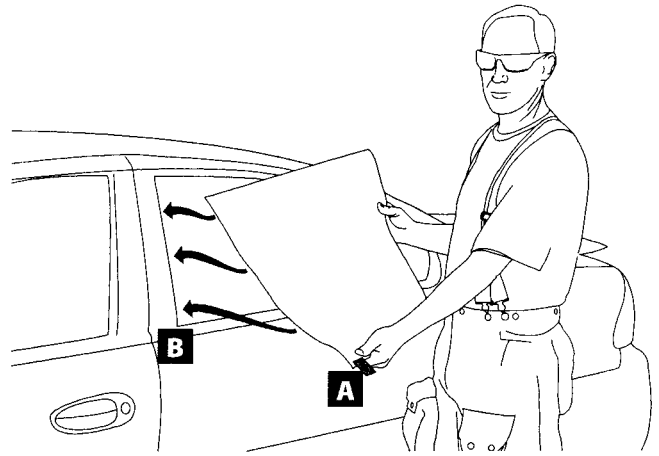


Step 2: Then peel off remaining backing, working from the B-post to the opposite corner of window; ensure that **GlassKeeper** adheres to glass at window frame. It is ok for **GlassKeeper** to adhere to the roof, as this will create the *hinge* when peeling out the window. Smooth the film with your hands as you move from one side to the other.

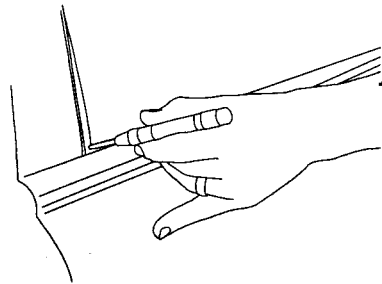

Step 3: Place spring-loaded center punch in lower corner of window outside the **GlassKeeper** and break window.

Step 4: Grab Red Tabs with each hand and pull out and away from the auto. The broken glass will adhere to the **GlassKeeper**.

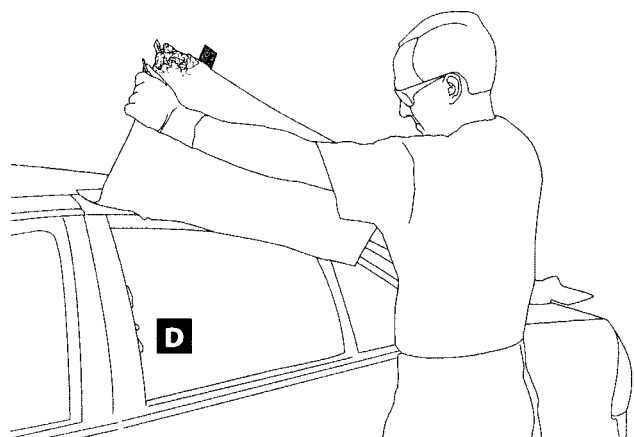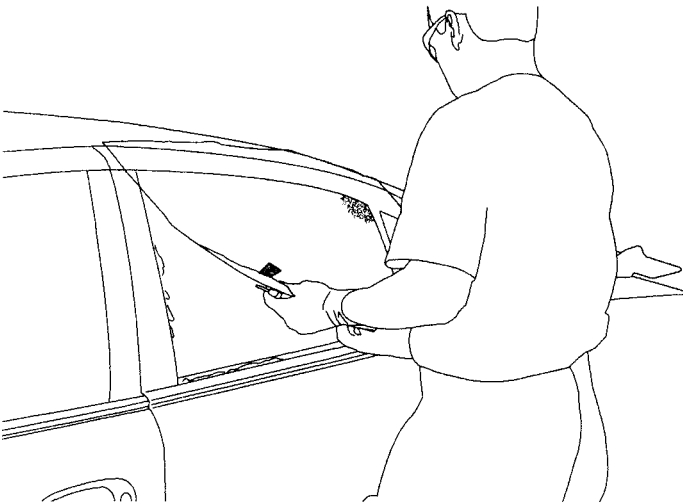

Step 5: Grab the bottom/sides of the window, breaking it away from the door frame and lay it on top of the roof. A few glass fragments (D) may stick in the window channel and can be quickly cleared with your gloved hand.



1501 Goodyear Avenue
Ventura, CA 93003
(888) 588-9981 / (805) 658-9922
www.gearkeeper.com
info@gearkeeper.com

Watch a Video of the Installation Procedure at:
www.gearkeeper.com/glass