

Gear Keeper

Combo Mount Sidearm Tether

Combo MOLLE Mount System

Hammerhead's Guarantee of Quality

If you are not satisfied with any Hammerhead Product, we will replace it or refund your money within thirty days after purchase through the original dealer. Hammerhead Industries warrants its products against manufacturing defects in workmanship or materials. The warranty is void if the product has been abused beyond normal and sensible wear and tear or used for purposes other than intended.

Cable/Line Warranty & Rebuild Policy

All Gear Keeper Retractors are manufactured with the highest quality cable/line. Occasionally inspect the cable/line for signs of wear in order to prevent loss of gear. Hammerhead Industries will replace the cable/line for a service charge of \$8.00.

Please contact Hammerhead Industries for a Return Authorization Number and mailing instructions.

If upon receipt of retractor Hammerhead determines that other components vital to the retractor are worn beyond their useful life, the \$8.00 will be returned and no repair will be done.

WARNING:

Do Not Release Retractor End When Fully Extended

Retraction may be rapid and forceful, resulting in injury and/or damage to the product.



Low Profile Prevents Snagging
No Tension on Sidearm ~ Acts as Safety Tether
Ideal for Extended Periods of Use



High Break Strength • Salt Water Proof • Self-Flushing



Connect lanyard directly to firearm; cinch tight



Optional: Use barrel lock to keep lanyard tight

Optional: Scissors Snap can be used to connect lanyard to Firearm

Easy connection/disconnection of Firearm

Mounting Systems



360° Rotating MOLLE Mount

Compact mount minimizes gear movement
Rotation minimizes resistance & maximizes line life

Remove Velcro Strap

Note: If Velcro Strap is not to be used, retainer bar may be cut off without affecting internal retractor operation

Velcro Strap MOLLE Mount


Ideal for attaching Gear Keeper to the MOLLE System or gun belt!
Allows Gear Keeper to pivot up and out during use for minimal resistance & maximum line life

Rotating MOLLE Bracket may be removed (remove 4 screws) without affecting internal retractor operation



Velcro Strap Installation

- Slide Moveable Loop up against Fixed Loop; then feed Velcro Strap through Retainer and back up through Moveable Loop.
- Pull up on Velcro Strap so that loops cinch down on Retainer.
- Feed Velcro Strap around belt or MOLLE webbing; then back through Fixed Loop.
- Affix Velcro Strap back on itself.

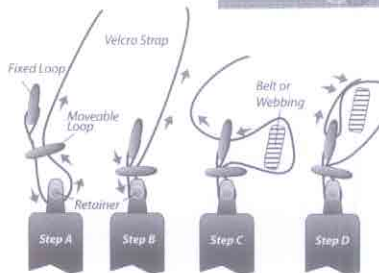

Specifications

- Spectra/Nylon Line
- Stainless Steel Spring & Hardware
- 36" Extension
- 3 oz. Retraction Force
- 60 lbs. Breaking Strength



RT4-5570

SideArm Tether Combo
Molle®/Baro



6 53096 45575 1



Patent # 5,697,572
Patent # 6,591,461
Patent # 6,966,519
Patents Pending

1501 Goodyear Avenue

Ventura, CA 93003

(888) 588-9981 (805) 658-9922

www.gearkeeper.com

info@gearkeeper.com

6-0036-18