

## ▶ Using the Locking Retractable Security Tether

The Gear Keeper® is mounted next to the device where it is worn on a belt, pants or purse. The device can also be stored in a pocket below the Gear Keeper when not in use. It is not intended to hang the device from the Gear Keeper®.

## ▶ How to use Ratcheting Lock


In most cases, when device is extended, the **Ratcheting Lock** will engage.

If not, extend device slightly until lock engages.

**To unlock;** extend device slightly until you feel some tension, then allow line to retract into Gear Keeper.

Or extend device to full extension stop, then allow line to retract.


## ▶ Phone Attachment Instructions



### For phones with integrated lanyard loop:

*Slip string of lanyard (enclosed) through lanyard loop on phone.*

*Pass male end of lanyard through string loop; then cinch tight on phone.*

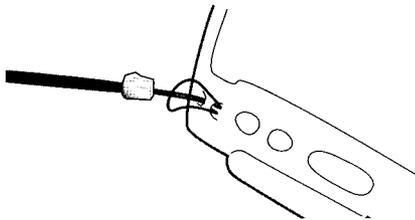


### For phones with leather case and split ring:

*Slip string of lanyard (enclosed) through split ring on leather case.*

*Pass male end of lanyard through string loop; then cinch tight on split ring.*

**To Attach Belt Clip to Pants, Belt or Purse**




Hold Gear Keeper in palm of one hand and slip metal tang over edge of pants or belt. Then, pull retractor away from body slightly to clear plastic tang. Slide Gear Keeper securely into place.

For questions, please contact Hammerhead Industries at [info@gearkeeper.com](mailto:info@gearkeeper.com) or (888) 588-9981 for other retractor options.



**For phones without attachment point:**



*Remove backing from one side of Adhesive Patch and apply the patch to back of the Pad Eye.*

*Select location on phone back that is flat and does not interfere with holstering system (If Pad Eye is too large for your spot, it can be cut at one or both indentations with scissors)*

*For best results, clean phone surface with alcohol. Then remove remaining backing from Pad Eye and adhere to phone surface. Allow 2 hours to set.*

*Slip string of lanyard (enclosed) through hole on Pad Eye.*

*Pass male end of lanyard through string loop; then cinch tight on Pad Eye.*

